

# 继电器配套底座 Relay Matching Base

CE

RoHS

IEC:61984



## 特性 Product features





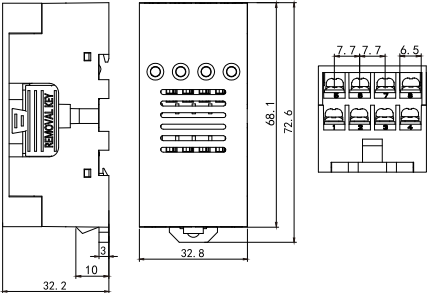




- 线圈与触点间的耐压2500VAC,绝缘电阻1000MΩ  
The withstand voltage between the coil and the contact is 2500VAC, and the insulation resistance is 1000MΩ
- 用二极管对线圈进行保护,消除逆向电流  
The coil is protected with diodes and reverse current is eliminated
- 外壳密封结构,可防止PCB因外露引起氧化及金属粉尘附着而造成短路  
The sealed housing structure prevents short circuits caused by oxidation and metal dust adhesion caused by exposed PCB
- 自带继电器保持及取出器  
Comes with relay holding and extractor


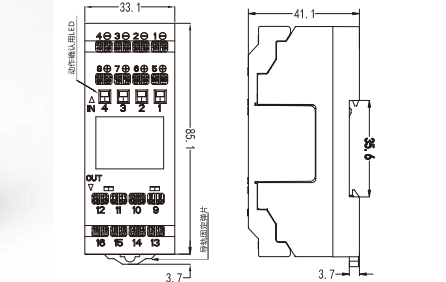
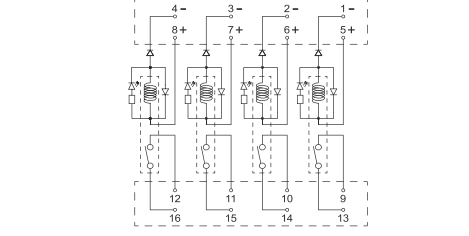

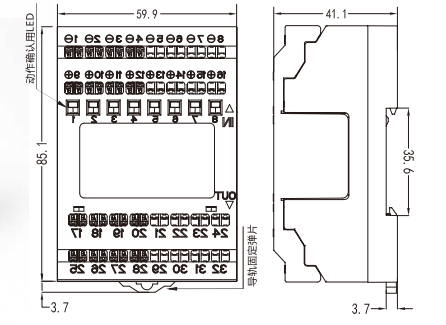
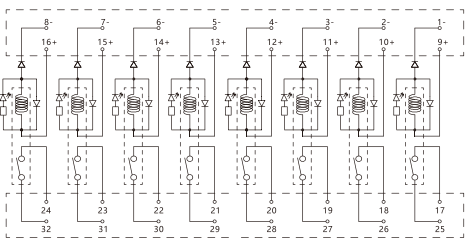

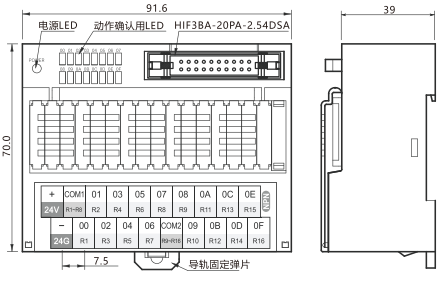

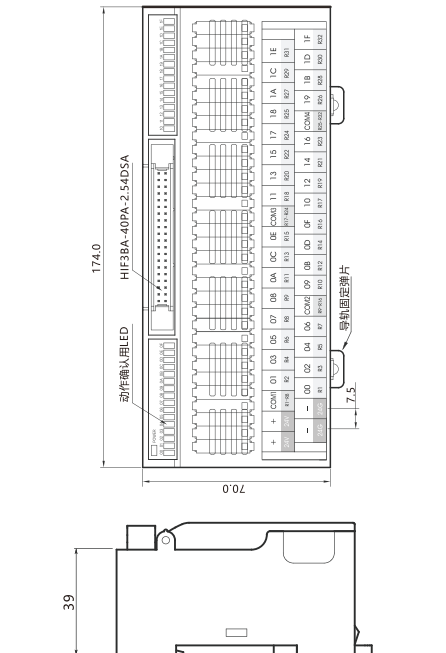
## 性能参数 Performance Parameter


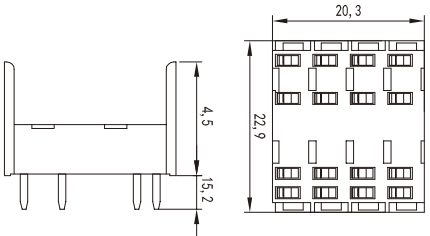


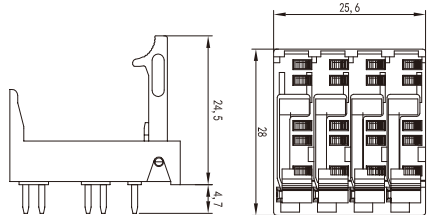

型号 Model	额定电压 Rated Voltage	额定电流 Rated Current	环境温度 Ambient Temperature	介质耐压 Dielectric Strength	插拔寿命 Plug-in life	螺钉扭矩 Screw Torque	外接导线 Size Of Wire	插片材料 Insert material	重量 Weight
RY1H4-16	250VAC	5A	-35°C~70°C	2500VAC	10000	0.8-1.0N.m	7mm	磷铜	约32.98g
RY1H4-16-S	250VAC	5A	-35°C~70°C	2500VAC	10000	0.8-1.0N.m	7mm	磷铜	约33.89g
RY1H4-16-T	250VAC	5A	-35°C~70°C	2500VAC	10000	/	7mm	磷铜	约33.89g
RY1H8-32-T	250VAC	5A	-35°C~70°C	2500VAC	10000	/	7mm	磷铜	约33.89g
RY1H16-64	250VAC	5A	-35°C~70°C	2500VAC	10000	0.8-1.0N.m	7mm	磷铜	约33.89g
RY1H32-128	250VAC	5A	-35°C~70°C	2500VAC	10000	0.8-1.0N.m	7mm	磷铜	约33.89g

## 外形图、接线图, 安装孔尺寸 Outline drawing, wiring diagram, mounting hole size

单位: mm

底座 Base	外形尺寸 Form Factor	接线图 Wiring Diagram	可选配件 Optional Accessories
RY1H4-16 			连接条 RY1H4-H RY1H4-H1(蓝blue) RY1H4-H1R(红Red) RY1H4-H1B(黑black)
RY1H4-16J 			连接条 RY1H4-H RY1H4-H1(蓝blue) RY1H4-H1R(红Red) RY1H4-H1B(黑black)
RY1H4-16-S 			连接条 RY1H4-HT(蓝blue) RY1H4-HTR(红Red) RY1H4-HTB(黑black)

底座 Base	外形尺寸 Form Factor	接线图 Wiring Diagram	可选配件 Optional Accessories
<p>Ry1H4-16-T</p> 			<p>连接条 RY1H4-HT(蓝blue) RY1H4-HTR(红Red) RY1H4-HTB(黑black)</p>
<p>Ry1H8-32-T</p> 			<p>连接条 RY1H8-HT(蓝blue) RY1H8-HTR(红Red) RY1H8-HTB(黑black)</p>
<p>Ry1H16-64</p> 		<p>(NPN) ⊕COM</p> <p>端子台部分</p> <p>(PNP) ⊖COM</p> <p>端子台部分</p>	
<p>Ry1H32-128</p> 		<p>(NPN) ⊕COM</p> <p>端子台部分</p> <p>(PNP) ⊖COM</p> <p>端子台部分</p>	



底座 Base	外形尺寸 Form Factor	接线图 Wiring Diagram	可选配件 Optional Accessories
 <p>RY1H4-A1</p>	 <p>Dimensions: 20,3, 22,9, 4,5, 15,2</p>	 <p>Dimensions: 20,3, 22,9, 2,6, 5,1, 10, 1,3, 5, 5, 5, 5, 2,6</p>	
 <p>RY1H4-A2</p>	 <p>Dimensions: 25,6, 24,5, 4,7, 28</p>	 <p>Dimensions: 25,6, 28, 2,6, 2,4, 7,6, 2,4, 5,1, 5,4, 6,1, 6,1, 6,1</p>	

## 相关配件可选 Related accessories are available

单位: mm

### 连接条 Connection Strips

RY1H4-H1(蓝blue) RY1H4-H1R(红Red)RY1H4-H1B(黑black)



RY1H4-H

